



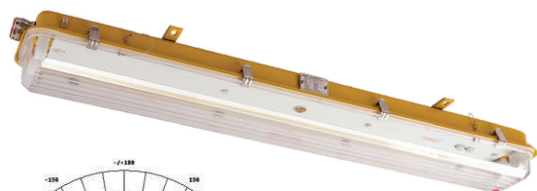

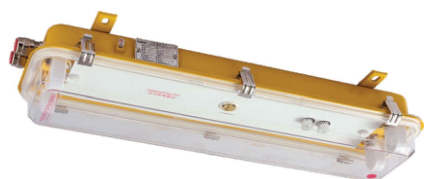




防爆舱顶灯 EXPLOSION-PROOF PENDANT LIGHT

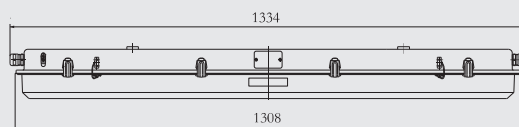

CFY22-2
CFY22-2E



CFY42-2
CFY42-2E



适用范围 The Scope of Application

适用于各类船舶2区爆炸性气体环境，如客滚船的滚装舱等场所作照明之用。

It is suitable for lighting in explosive gas environment in zone 2 of all kinds of ships, such as the roll-on/roll-off cabin of passenger ships.

型号 Part Number	CFY22-2		CFY22-2E		CFY22-2D		CFY22-2ED		CFY22-2L		CFY22-2EL		CFY42-2		CFY42-2E		CFY42-2D		CFY42-2ED		CFY42-2L		CFY42-2EL	
防爆标志 Explosion-proof Mark	Ex nR IIC T6 Gc																							
额定电压 Rated Voltage	110V 60Hz 220V 50Hz 220V 60Hz				AC100-240V 50/60Hz				AC100-240V 50/60Hz				110V 60Hz 220V 50Hz 220V 60Hz				AC100-240V 50/60Hz				AC100-240V 50/60Hz			
功率 Power	2×18W				2×10W				2×10W				2×36W				2×20W				2×20W			
功率因数 Power Factor	≥0.9				≥0.9				≥0.9				≥0.9				≥0.9				≥0.9			
光源 Illuminant	荧光灯管 Fluorescent Lamp				LED灯管 LED Tube				LED模组 LED Module				荧光灯管Fluorescent Lamp				LED灯管 LED Tube				LED模组 LED Module			
光通量 Luminous Flux	1400 lm				1700 lm				1880 lm				3400 lm				3410 lm				3440 lm			
灯座 Lamp Holder	G13		G13/B15d		G13		G13/B15d		/				G13		G13/B15d		G13		G13/B15d		/			
显色指数 Color Rendering Index	Ra ≥ 80																							
应急方式 Emergency Mode	/		DC24V 应急3W Emergency 3W		/		DC24V 应急3W Emergency 3W		/		DC24V 应急3W Emergency 3W		/		DC24V 应急3W Emergency 3W		/		DC24V 应急3W Emergency 3W		/		DC24V 应急3W Emergency 3W	
防护等级 Protection Class	IP66																							
电缆外径 Cable Outside Diameter	Ø10~Ø16																							
安装方式 Installation Method	吸顶式 Ceiling-mounted Type																							
环境温度 Ambient Temperature	-30℃ ~ +55℃																							
灯体材质 Lamp Body Material	钢, 不锈钢 Steel, Stainless Steel																							
灯罩材质 Lamp Shade Material	工程塑料PC Enginccring Plastics PC																							
重量 Weight	4.3kg				4.3kg				4.3kg				11.0kg				11.0kg				11.0kg			