


荧光舱顶灯
 FLUORESCENT PENDANT LIGHT

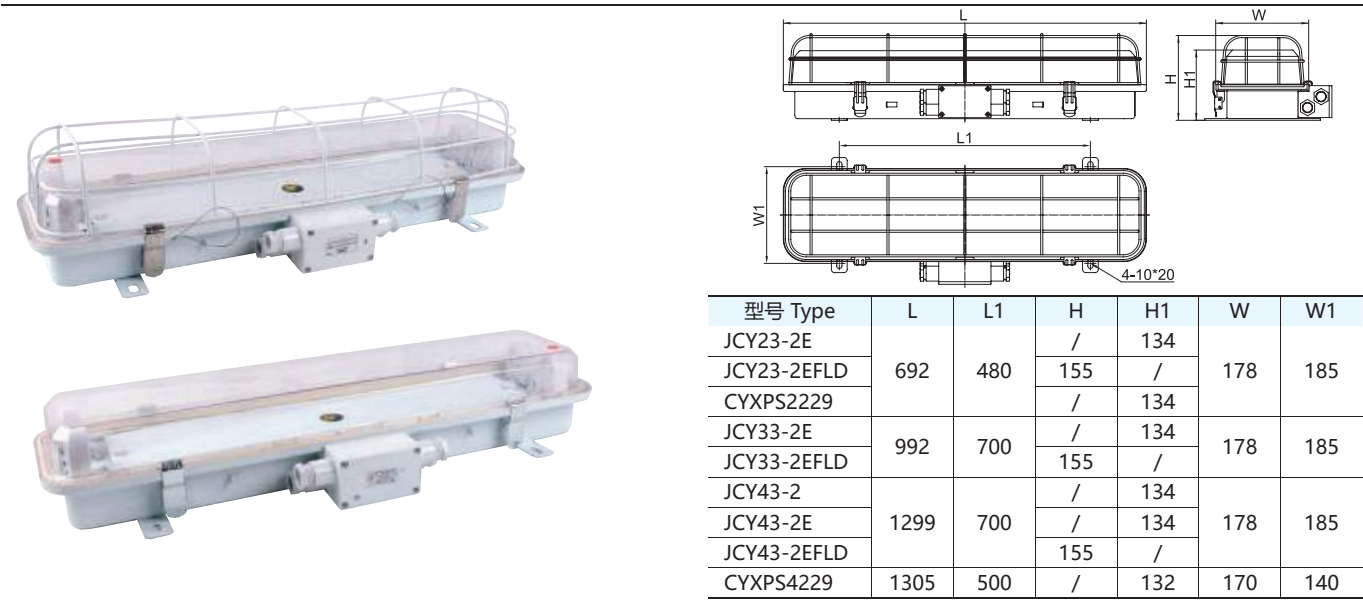

适用范围

适用于各类船舶有滴水、溅水和凝水的场所照明之用，如机炉舱、干货舱、轴隧、管弄、露天甲板等。

产品特点

- 壳体采用优质钢板拉伸成型，可定制不锈钢材质，灯罩采用优质抗紫外线 PC 注塑一体成型，密封性能良好；
- 灯具可配有 B15d 灯座，用于 24V/15W 应急灯泡照明，其灯罩的边缘标有 ● 标志，订货时请注明需应急装置；

采用标准

符合 JISF8008-2002 标准与《钢质海船入级规范》。

规格 Specifications

型号 Type	电压 Voltage	功率 Power	功率因数 Power factor	显指 CRI	灯座 Lamp holder	光通量 luminous flux	光源 Light source	色温 C.T	防护等级 Protection class	重量 Weight	备注 Remarks
JCY23-2	110V/60Hz 220V/50Hz 220V/60Hz	2×20W	≥ 0.95	≥ 70	G13-B	4400LM	T8 荧光灯管 Fluorescent tube	白光 White light	IP56	5.35kg	-
JCY23-2E										5.36kg	带应急 With emergency
JCY23-2EF										5.5kg	带应急和网罩 With emergency and guard
CYXPS2229										5.35kg	不锈钢 Stainless steel
JCY33-2		2×30W				7200LM				7kg	-
JCY33-2E										7.1kg	带应急 With emergency
JCY33-2EF										8kg	带应急和网罩 With emergency and guard
JCY43-2										9kg	-
JCY43-2E		2×40W				8800LM				9.1kg	带应急 With emergency
JCY43-2EF										10kg	带应急和网罩 With emergency and guard
CYXPS4229										9kg	不锈钢 Stainless steel
JCY23-2LD	85V~265V		2×10W	3120LM			T8 LED 灯管 Tube	3000K(可选) 4000K(可选) 6000K(常规)		5kg	-
JCY23-2ELD		5.1kg				带应急 With emergency					
JCY23-2ELDF		5.5kg				带应急和网罩 With emergency and guard					
CYXPS2229LD		5kg				不锈钢 Stainless steel					
JCY33-2LD		2×15W	4680LM	6.5kg		-					
JCY33-2ELD				6.6kg		带应急 With emergency					
JCY33-2EFLD				7.8kg		带应急和网罩 With emergency and guard					
JCY43-2LD				7kg		-					
JCY43-2ELD		2×20W	6240LM	7.1kg		带应急 With emergency					
JCY43-2ELDF				8.5kg		带应急和网罩 With emergency and guard					
CYXPS4229LD				7kg		不锈钢 Stainless steel					

注：以上参数为 LED 玻璃灯管，可选配 LED 铝塑灯管 The above parameters are for LED glass tubes, and LED aluminum-plastic tubes can be optionally equipped