



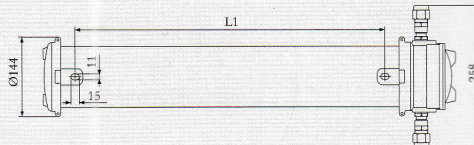





CFY20-2
CFY20-2E
CFY20-2G




CFY40-2
CFY40-2E
CFY40-2G




	L	L1
CFY20	751	556
CFY40	1363	1166



吸顶式安装
Absorb top type



吊杆式安装
Hang pole type

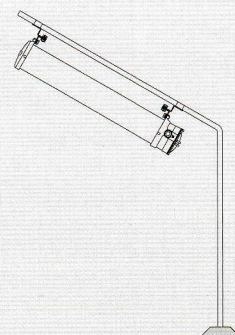

立杆式安装
Vertical stick type

适用范围 The Scope of Application

适用于舰艇、石油开采平台、化工及具有爆炸气体环境中的1区或2区场所照明。

It is suitable for lighting of ships, oil exploration platforms, chemical industry and places 1 or 2 in explosive gas environments.

型号 Part Number	CFY20-2	CFY20-2E	CFY20-2G	CFY40-2	CFY40-2E	CFY40-2G
防爆标志 Explosion-proof Mark	Ex db II C T6 Gb					
额定电压 Rated Voltage	AC100-120V、AC220~240V 50/60Hz					
功率 Power	Max.2×20W			Max.2×40W		
功率因数 Power Factor	≥0.9					
光源 Illuminant	荧光灯 Fluorescent Lamp					
光通量 Luminous Flux	1160 lm			2980 lm		
灯座Lamp holder	G13					
应急方式 Emergency Mode	/	DC24V应急 3W Emergency 3W	蓄电池应急 5W Battery Emergency 5W	/	DC24V应急 3W Emergency 3W	蓄电池应急 5W Battery Emergency 5W
防护等级 Protection Class	IP66/IP67					
电缆外径 Cable Outside Diameter	Ø10~Ø16					
安装方式 Installation Method	吊杆式, 吸顶式, 立杆式 Hanging-mounted Type, Ceiling-mounted Type, Vertical Stick Type					
环境温度 Ambient Temperature	-30℃ ~ +55℃					
灯体材质 Lamp Body Material	不锈钢 Stainless Steel					
灯罩材质 Lamp Shade Material	工程塑料PC Engineering Plastics PC					
重量 Weight	6.8kg	6.8kg	6.8kg	9kg	9kg	9kg
备注 Remark	以上均可选单灯管 The Above Can be Optional Single Lamp					
认证 Certification	取得IECEX和ATEX认证 IECEX and ATEX Certification					