



DELTA G2

LED FLOODLIGHT


FEATURES

- High pressure die-cast aluminum alloy housing
- Finished with polyester powder paint & corrosion resistant
- Back opening for easy maintenance
- Aluminium clips
- Clear tempered glass cover
- Standard colour grey


CHARACTERISTICS

- Wattage : 30W~240W
- Input Voltage : AC100-240V 50Hz/60Hz
- Light Efficacy : $\geq 120 \sim 130$ Lm/W
- Power Factor : > 0.90
- Color Rendering Index (CRI) : ≥ 70
- Color Temperature CCT : 3000K~6000K
- Light Source : LED @ 50,000hrs
- Power Source : Constant Current LED driver
- Operating temperature : $-25^{\circ}\text{C} \sim +40^{\circ}\text{C}$
- IP Rating : IP66
- IK Rating : IK08

DIMENSION (mm)

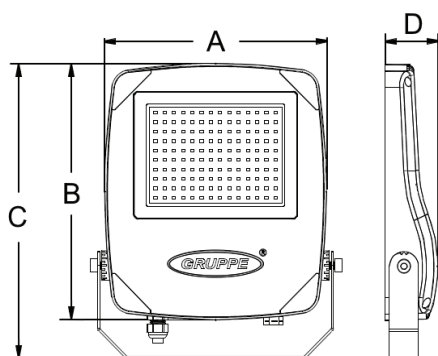

PHOTOMETRIC CURVE

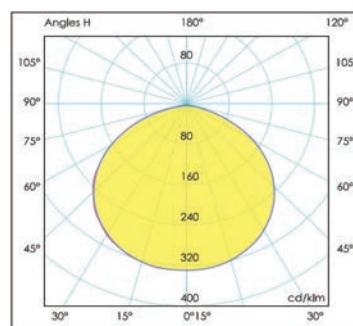

Model No.	Description	A(mm)	B(mm)	C(mm)	D(mm)
DLG03030	DELTA G2 LED Floodlight 30W	185	225	275	55
DLG05030	DELTA G2 LED Floodlight 50W	185	225	275	55
DLG10030	DELTA G2 LED Floodlight 100W	230	260	300	55
DLG15030	DELTA G2 LED Floodlight 150W	270	280	305	58
DLG20030	DELTA G2 LED Floodlight 200W	310	350	405	65
DLG24030	DELTA G2 LED Floodlight 240W	350	395	453	65

** The above ordering code is base on CCT-3000K