

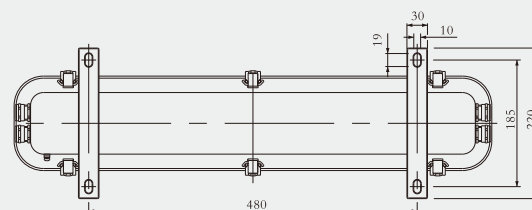
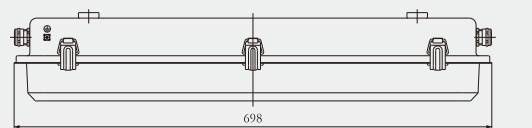


JCY22-2D
JCY22-2ED


JCY42-2D
JCY42-2ED

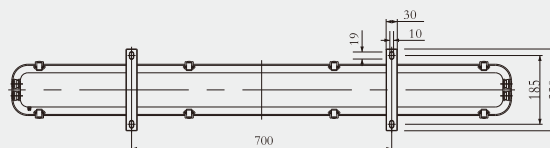

JCY22-2D
JCY22-2ED



JCY42-2D
JCY42-2ED



适用范围 The Scope of Application

适用于各类船舶有滴水、溅水和凝水的场所，如机炉舱、干货舱、轴隧、管弄、露天甲板等场所作照明之用；
Applied to illumination of water dripping, water spattering, water coagulating place in ships, such as oven cabin, dry cabin, tunnel, pipeline and weather deck etc.

型号 Type	JCY22-2D	JCY22-2ED	JCY42-2D	JCY42-2ED
额定电压 Rated Voltage	AC100~240V 50/60Hz	AC100~240V 50/60Hz	DC24V	AC100~240V 50/60Hz
功率 Power	2×10W	2×10W	3W	2×20W
功率因数 Power Factor	≥0.9		≥0.9	
光源 Illuminant	LED灯管 LED Tube	LED灯泡 LED Bulb	LED灯管 LED Tube	LED灯泡 LED Bulb
光源颜色 Illuminant Color	白 White		白 White	
灯座 Lamp Holder	G13	B15d	G13	B15d
光通量 Luminous Flux	2200 lm	2200 lm	4500 lm	4500 lm
显色指数 Color Rendering Index	Ra ≥ 80		Ra ≥ 80	
色温 Color Temperature	6500K		6500K	
防护等级 Protection Class	IP56		IP56	
电缆外径 Cable Outside Diameter	Ø10~Ø14		Ø10~Ø14	
安装方式 Installation Method	吸顶式 Ceiling-mounted Type		吸顶式 Ceiling-mounted Type	
环境温度 Ambient Temperature	-30℃ ~ +55℃		-30℃ ~ +55℃	
灯体材质 Lamp Body Material	钢 Steel, 不锈钢 Stainless Steel		钢 Steel, 不锈钢 Stainless Steel	
灯罩材质 Lamp Shade Material	工程塑料PC Engineering Plastics PC		工程塑料PC Engineering Plastics PC	
灯罩颜色 Lamp Shade Color	透明 Transparent		透明 Transparent	
重量 Weight	4.5kg		7.5kg	