
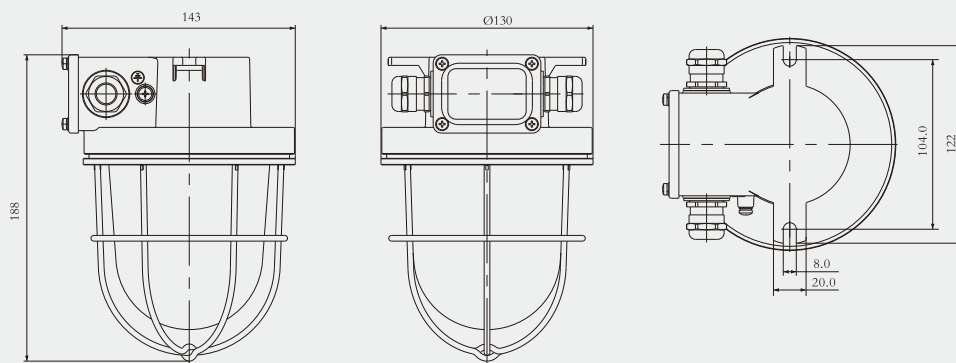


## 舱顶灯 PENDANT LIGHT



### 适用范围 The Scope of Application

适用于各类船舶甲板、走道等潮湿场所或舱室照明。

Applied to the illumination for ship cabins, or the wet places such as ship decks, ship sidewalks.

|                             |                       |                                          |     |                       |                                          |     |
|-----------------------------|-----------------------|------------------------------------------|-----|-----------------------|------------------------------------------|-----|
| 型号 Type                     | CCD9-5                | CCD9-5D                                  | LED | CCD9-5A               | CCD9-5AD                                 | LED |
| 额定电压 Rated Voltage          | AC220V                | AC100 ~ 240V 50/60Hz                     |     | DC24V                 | DC24V                                    |     |
| 功率 Power                    | 60W                   | 10W                                      |     | 25W                   | 3W                                       |     |
| 光源 Illuminant               | ≥ 0.9                 |                                          |     | ≥ 0.9                 |                                          |     |
| 功率因数 Power Factor           | 白炽灯 Incandescent Lamp | LED 灯泡 LED Bulb                          |     | 白炽灯 Incandescent Lamp | LED 灯泡 LED Bulb                          |     |
| 光源颜色 Illuminant Color       | 白 White               |                                          |     | 白 White               |                                          |     |
| 灯座 Lamp Holder              | E27                   | E27                                      |     | B15d                  | B15d                                     |     |
| 光通量 Luminous Flux (lm)      | 450 lm                | 850lm                                    |     | 150 lm                | 300lm                                    |     |
| 显色指数 Color Rendering Index  | Ra ≥ 95               | Ra ≥ 80                                  |     | Ra ≥ 95               | Ra ≥ 80                                  |     |
| 色温 Color Temperature        | 3000K                 | 6000K (可选 Optional: 3000K, 4000K, 5000K) |     | 3000K                 | 6000K (可选 Optional: 3000K, 4000K, 5000K) |     |
| 防护等级 Protection Class       | IP66                  |                                          |     |                       |                                          |     |
| 电缆外径 Cable Outside Diameter | Ø10 ~ Ø14             |                                          |     |                       |                                          |     |
| 安装方式 Installation Method    | 固定式 Stationary Type   |                                          |     |                       |                                          |     |
| 环境温度 Ambient Temperature    | -30℃ ~ +55℃           |                                          |     |                       |                                          |     |
| 灯体材质 Lamp Body Material     | 铜 Brass               |                                          |     |                       |                                          |     |
| 灯罩材质 Lamp Shade Material    | 玻璃 Glass              |                                          |     |                       |                                          |     |
| 灯罩颜色 Lamp Shade Color       | 透明 Transparent        |                                          |     |                       |                                          |     |
| 重量 Weight                   | 1.8kg                 |                                          |     |                       |                                          |     |