


SUNLUX[®]

500W LED Floodlight, IP66

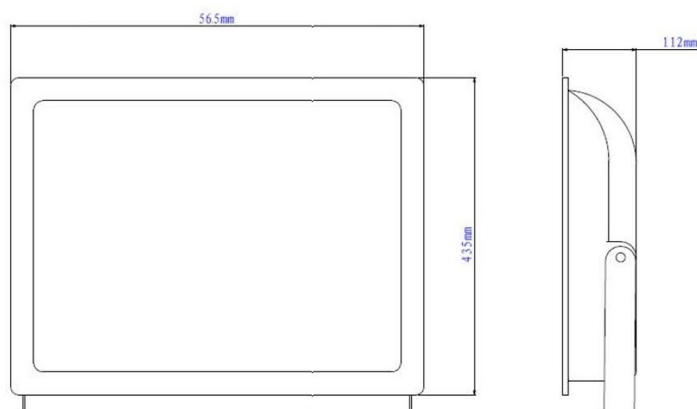

●Features

Item	Parameter range
Power	500W(With External driver UL)
LED Quantity	500PCS Integration 3030 1W LED
Color	Cool white
CCT	2700K-5700K
CRI	≥75
Life-span	≥50,000 Hours
Flux	55000 +/- 10% LM
Beam Angle	120°
Material	Aluminum + Toughened glass
Net Weight	MAX 12KG/PC
Gross Weight	MAX 13KG/PC
Outer carton Dimension	57*46*12cm
Package Spec.	1PC/CTN, 13KG/CTN

●Technical request

item	units	Parameter range
working environment	℃	-37℃ - 55℃
Working Humidity		≤95%
storage condition	℃	-40℃~80℃
limited voltage	V	100-277VAC 50/60Hz
Protection Level		IP66(outdoor using)