

theRonda S360-110 DALI UP WH

Item no.: 2080580

theben

Presence and motion detectors
Ceiling installation indoor

Description

- Passive infra-red presence detector for flush-mounted ceiling installation, DALI-2 certified
- Circular detection area 360°, Ø 8 m, (50 m²) at mounting height 3 m
- 1 channel light DALI-2 in broadcast mode
- DALI-2 technology according to IEC 62386 Parts 101 and 103
- 1 push-button input
- Using of conventional push-buttons for maximum design freedom
- Switch or constant light control mode with stand-by function
- Dimmable lighting in switch mode with stand-by function
- Choice of fully or semi-automatic operation
- Adjustable brightness switching value
- Teach-in function via remote control or push-button
- Setting of room correction factor (Automatic adjustment of brightness measurement)
- Light time delay can be set
- Calibrated 1 channel light measurement
- Brief-presence
- Self-learning time delay
- Extremely easy setting of energy saving characteristics with the new „eco plus“ function
- Selectable control speed
- Manual override via remote control or pushbutton
- Behavior after push button operation selectable (school / office)
- Test mode light
- Test-Mode presence
- Remote-controllable
- Scenes
- Sensitivity adjustable
- Detection area can be limited using cover clip
- Extension of detection area via Master/Slave or Master/Master switching
- Optimized handling by installer during assembly, wiring, commissioning



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080580

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025
Page 1 of 5

theRonda S360-110 DALI UP WH


Item no.: 2080580

theben

Technical data

theRonda S360-110 DALI UP WH		theRonda S360-110 DALI UP WH	
Operating voltage	110 V AC - 230 V AC	Lamp types	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Frequency	50 - 60 Hz	Control output	100 mA
Installation height	2 - 4 m	Output light	DALI-interface according to IEC SN EN 62 386 for max. 50 DALI devices
Minimum height	1.7 m	Max. cable cross section	max. 2 x 2,5 mm ²
Installation type	Ceiling installation	Size of concealed housing	55 mm
Colour	White	Detection range	50 m ² (Ø 8 m 360°)
Switching output	DALI	Detection angle	360°
Power consumption	<0.4 W	Ambient temperature	-15°C ... 50°C
Light measurement	Mixed light measurement	Type of protection	IP 54 (when fitted)
Setting range brightness	10 - 3000 lx		
Light switch-off delay	10 s - 60 min		
Stand-by time light	0 s - 60 min / on		
Stand-by brightness	1 - 25 %		

Connection example

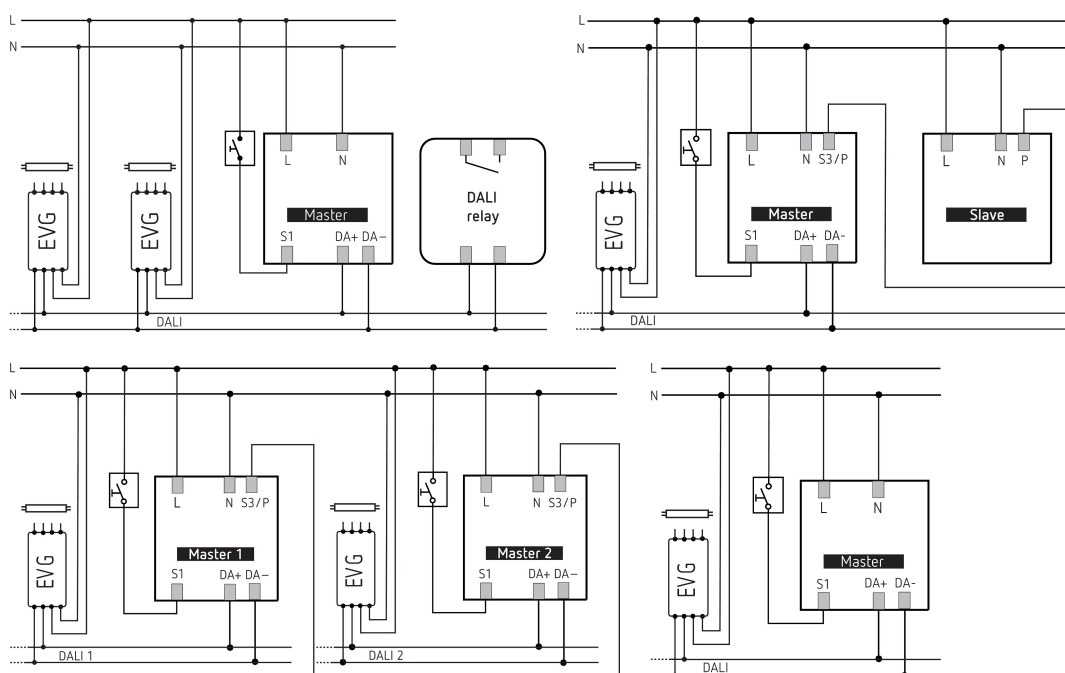

Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Sitting (S)	Diagonally (T)	Head on to (R)
2 m	5 m ² 2.5 m	38 m ² 7 m	5 m ² 2.5 m
2.5 m	7 m ² 3 m	38 m ² 7 m	7 m ² 3 m
3 m	13 m ² 4 m	50 m ² 8 m	13 m ² 4 m
3.5 m		50 m ² 8 m	13 m ² 4 m
4 m		64 m ² 9 m	13 m ² 4 m

Subject to technical changes and misprints

additional information at: www.theben.de/product/2080580

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025


Page 2 of 5

theRonda S360-110 DALI UP WH

Item no.: 2080580




Detection range for planning applications at a temperature of 21 °C

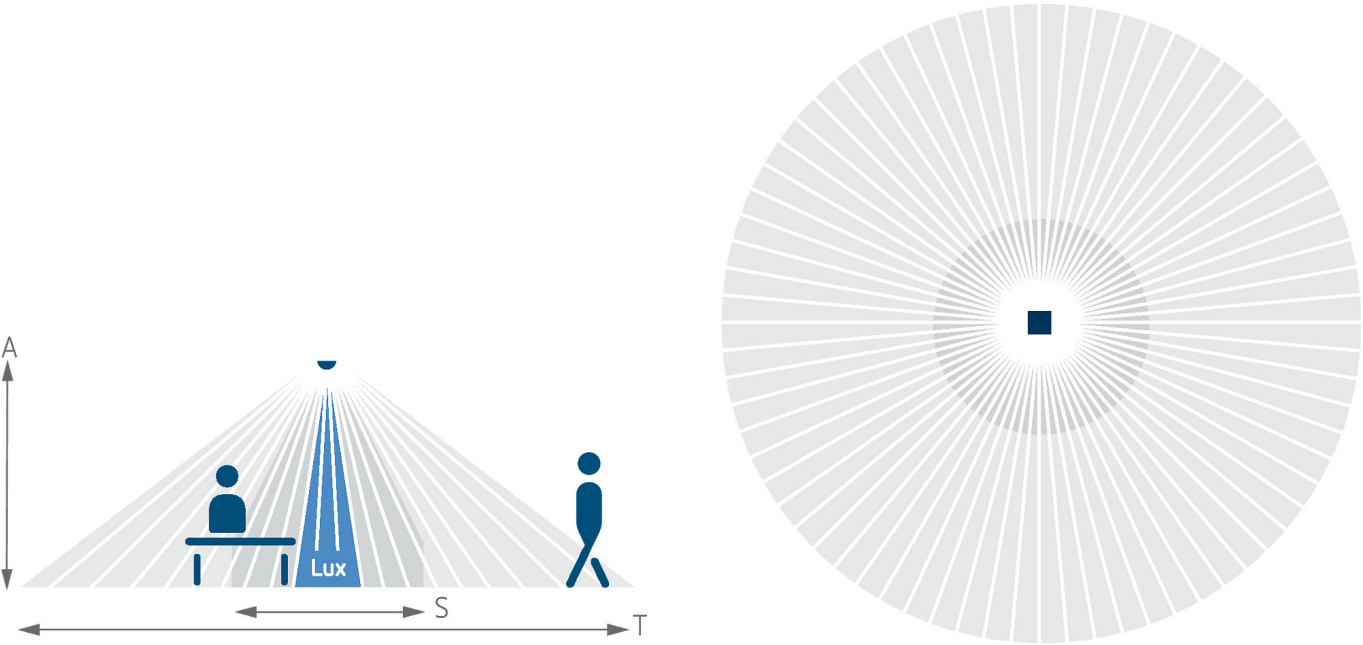

Detection range according to Sensnorm IEC 63180

Mounting height (A)	Diagonally (T)	Head on to (R)	Sitting (S)
2.5 m	50 m² 8 m	28 m² 6 m	20 m² 5 m
4 m	79 m² 10 m	71 m² 9.5 m	

Scale drawings

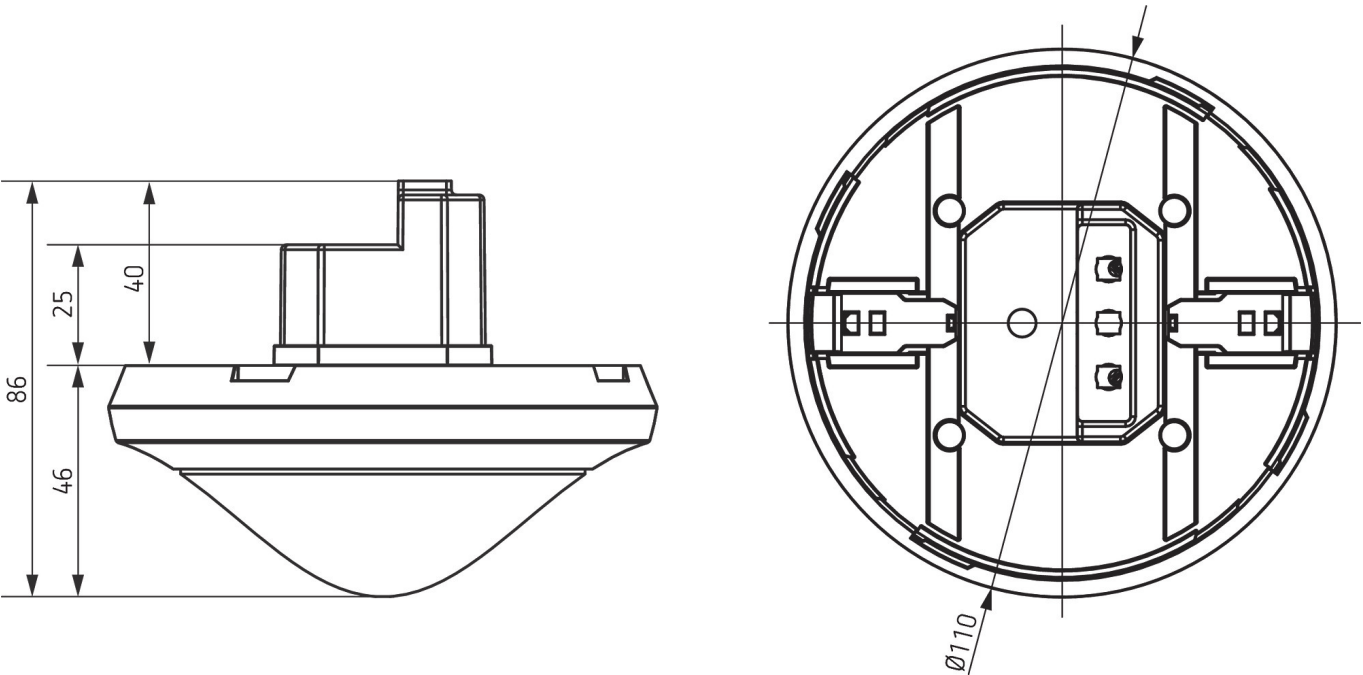

Subject to technical changes and misprints
 additional information at: www.theben.de/product/2080580
 The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda S360-110 DALI UP WH

Item no.: 2080580

theben

Accessories

theSenda P

Item no.: 9070910



theSenda S

Item no.: 9070911



Surface frame 110A GR

Item no.: 9070913




Ceiling installation box 73A

Item no.: 9070917

Surface frame 110A WH

Item no.: 9070912




Masking clip

Item no.: 9070921



QuickSafe

Item no.: 9070531



theSenda B

Item no.: 9070985



Cover 110 GR

Item no.: 9070591




Ceiling installation box 68A

Item no.: 9070992



SU 1 DALI-2

Item no.: 4940091



Surface frame 110A BK

Item no.: 9070600



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080580

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025

Page 4 of 5

theRonda S360-110 DALI UP WH

Item no.: 2080580



Accessories

Cover 110 BK

Item no.: 9070851

